

AD 41300

4 Channel Power Amplifier




Pulz AD41300 is a four channel power amplifier designed and built for applications where sonic transparency and robust high power output capability are the prime criteria.

Built around an oversized classic toroidal power supply and ultra - linear Class AB output stage, Pulz AD41300 packs 7000 Watts of continuously deliverable clean audio in a 3U chassis.

This is made possible by the innovative dynamic tracking power controller (DPT) which fluidly adjusts the power supply rails to track the signal. As a result unwanted power dissipation in the output stages is minimized by almost 80%. The Pulz AD41300 remains relatively cool even when driving the most demanding low impedance subwoofer loads. This approach is superior to the standard SMPS based power supplies which are prone to failures and compromise the sonic purity due to interferences.

All the components used in the Pulz AD41300 are of the highest standard and from the most reputed manufacturers.

Channel independent soft clipping, level indicators, sensitivity selection, protection and high CMRR balanced input stages are the additional useful features which makes Pulz AD41300 outperform the standard amplifiers currently available.

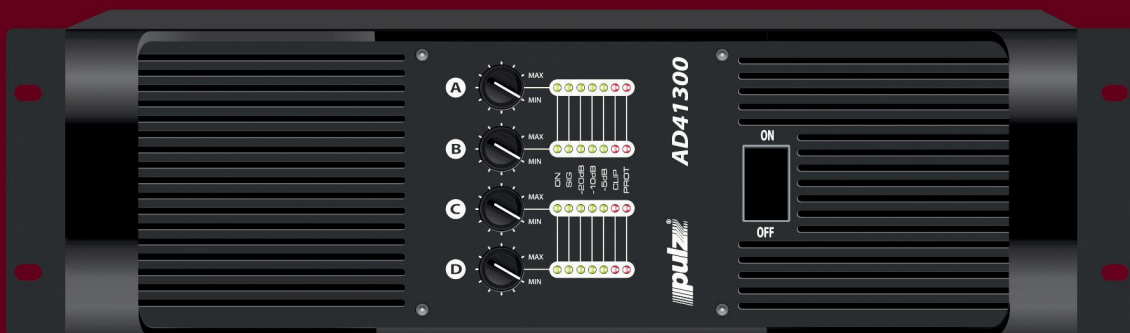


Features :

- High efficiency DPT Technology
- Premium heavy duty Toroidal Transformer
- Highly sensitive CMRR balanced input stage
- Ultra low-load output capacity
- Channel independent power, Signal and clip LEDs

DPT

AD 41300

4 Channel Power Amplifier

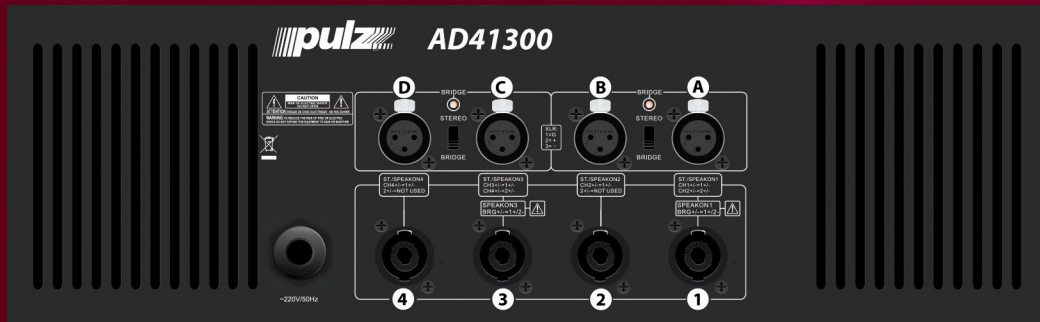

Specifications

No. of Channels	4
Output Power (per channel)	4 X 900 Watts @ 8Ω 4 X 1300 Watts @ 4Ω 2 X 2600 Watts @ 8Ω in bridge mode 2 X 3800 Watts @ 4Ω in bridge mode
Frequency response	20Hz – 20kHz, +0/-0.5dB
Total Harmonic Distortion + Noise	<0.5%
Signal to Noise Ratio	-90dB
Damping factor	>100 @ 8Ω
Crosstalk	<-60dB
Slew Rate	>10V/us
Full Power Input Sensitivity	1V RMS
Input Impedance	20kΩ, balanced
Voltage Gain	40.8dB
Bandwidth	100kHz
Cooling	Air flow from front to rear
Protection	Fuseless short circuit protection, Ultrasonic and RF protection, Thermal protection
Load protection	Turn on delay, DC fault protection, Ultrasonic limiting
Power requirement	220V AC 50Hz, ±10%

Connectors

Inputs	Balanced inputs XLR-F
Outputs	NL4 Speakon
Front panel	Power switch, Level control, Power indicator, Signal indicator, Clip, Protection
Rear panel	Bridge indicators, Stereo/Bridge switches

Dimensions/Weight

Product dimensions	132 mm X 483 mm X 493 mm (5.2" X 19" X 19.4")
Net Weight	34 kg (75 lb)
Packed Weight	36 kg (79 lb)

Pulz reserves the right to make changes in specifications without prior notice

sound matters

Pulz Electronics Ltd.
Kailashpati, 2nd Floor
Plot 10 A, Veera Desai Road,
Andheri (W), Mumbai 400 053, India
Tel: +91 22 26732593
E-mail: sales@pulz.co.in
www.pulz.co.in